



Combustible Wall and Roof Thimble

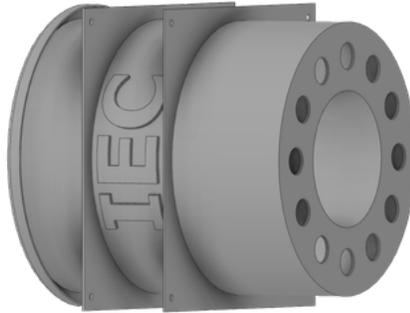

Part Number	Size	A	B	C
		Exhaust OD (in)	Wall Plate (in)	Body OD (in)
IECWT150T	1.5	1.625	18	14
IECWT150P	1.9	2.025	18	14
IECWT200T	2	2.125	18	14
IECWT200P	2.375	2.5	20	16
IECWT250T	2.5	2.625	20	16
IECWT250P	2.875	3	20	16
IECWT300T	3	3.125	20	16
IECWT300P	3.5	3.625	20	16
IECWT350T	3.5	3.625	20	16
IECWT350P	4	4.125	20	16
IECWT400T	4	4.125	20	16
IECWT400P	4.5	4.625	22	18
IECWT450T	4.5	4.625	22	18
IECWT500T	5	5.125	22	18
IECWT500P	5.563	5.688	22	18
IECWT600T	6	6.125	22	18
IECWT600P	6.625	6.75	24	20
IECWT800T	8	8.125	24	20
IECWT800P	8.625	8.75	26	22
IECWT1000T	10	10.125	26	22
IECWT1000P	10.75	10.875	28	24
IECWT1200T	12	12.125	28	24
IECWT1200P	12.75	12.875	30	26
IECWT1400	14	14.125	30	26
IECWT1600	16	16.125	32	28
IECWT1800	18	18.125	38	34
IECWT2000	20	20.125	38	34
IECWT2200	22	22.125	42	38
IECWT2400	24	24.125	42	38

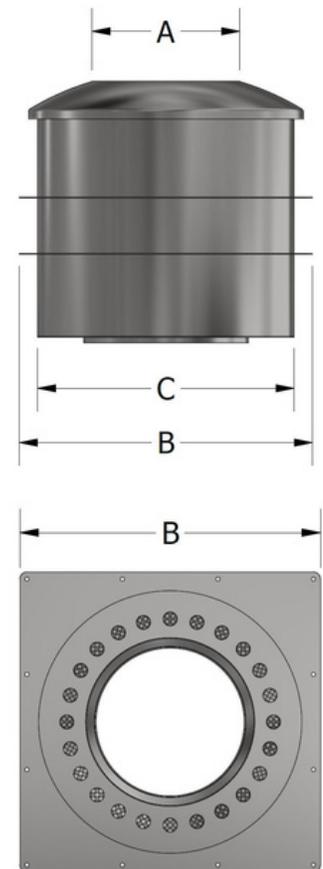

- All dimensions are in inches
- Conforms to NFPA 37 and 110.
- All thimbles are insulated with high density fiberglass.
- The above thimbles have been sized for standard (8") thickness walls. Thimbles for other wall thicknesses are available upon request.
- Custom configurations are available to suit specific project requirements. Please contact our team for sizing, design assistance, and detailed specifications.